


1.4.3. Nearest Neighbors Regression

Shinya Kunii

最近傍法(回帰)

- Estimate continuous variables
- A query point is computed based the mean of the labels of its nearest neighbors.
- 関数
 - [KNeighborsRegressor](#)
 - Kはユーザが決める
 - [RadiusNeighborsRegressor](#)
 - K
 - R : 予測したい点からの半径

KNeighborsRegressor (k = 5, weights = 'uniform')

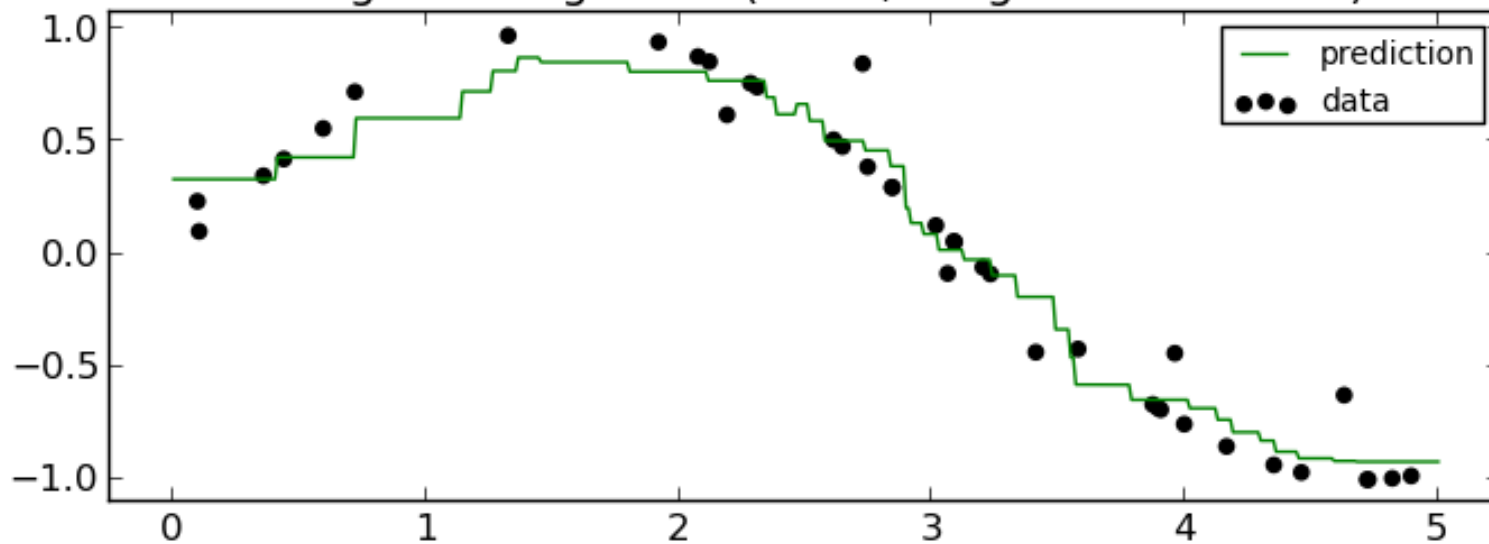

KNeighborsRegressor (k = 5, weights = 'distance')

